

HF motor NC35




ELECTRIC FEATURES – CARATTERISTICHE ELETTRICHE – ELEKTRISCHE DATEN

TYPE TIPO TYP	POWER POTENZA LEISTUNG	VOLTAGE TENSIONE SPANNUNG	FREQ.	SPEED VELOCITA' DREHZAHL	ABSORB. ASSORB. AMP AUFN	WEIGHT PESO GEW.
	kW	V	Hz	RPM	A	kg
NC35 – A – SB	0.22	220 / 380	200	12000	1.6 / 0.9	2.5
NC35 – AA – SB	0.35	220 / 380	200	12000	2.1 / 1.2	2.6
NC35 – B – SB	0.37	220 / 380	200	12000	2.1 / 1.2	2.9
NC35 – C – SB	0.55	220 / 380	200	12000	2.7 / 1.5	3.1
NC35 – D – SB	0.73	220 / 380	200	12000	3.1 / 1.8	3.7

For different voltage and frequency, contact our technical office. – Per valori diversi di tensione e frequenza, contattare l'ufficio tecnico.


OVERALL DIMENSIONS – DIMENSIONI INGOMBRO – ABMESSUNGEN

NC35 – SB – L13

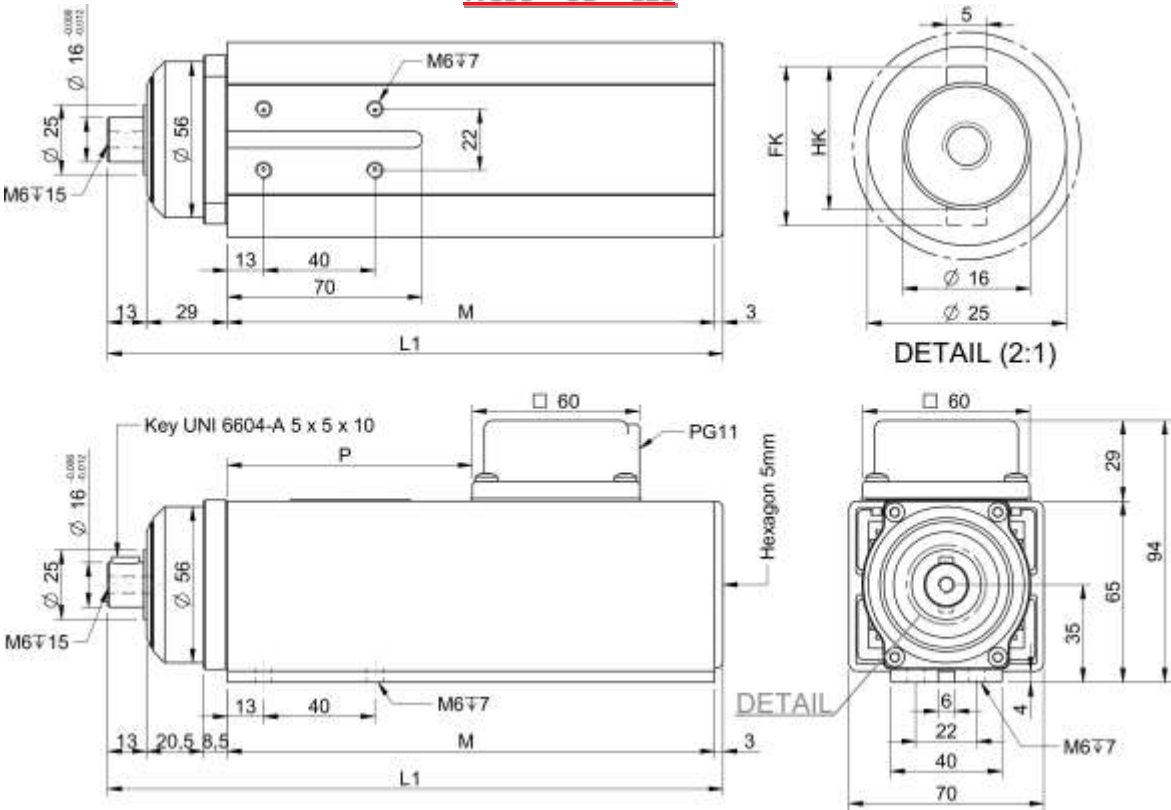

TYPE – TIPO – TYP	L1 [mm]	P [mm]	M [mm]	HK [mm]	FK [mm]
NC35-A-SB-L13	180	48	135	18	19
NC35-AA-SB-L13	180	48	135		
NC35-B-SB-L13	205	73	160		
NC35-C-SB-L13	220	88	175		
NC35-D-SB-L13	240	108	195		


NC35 – SB – AR

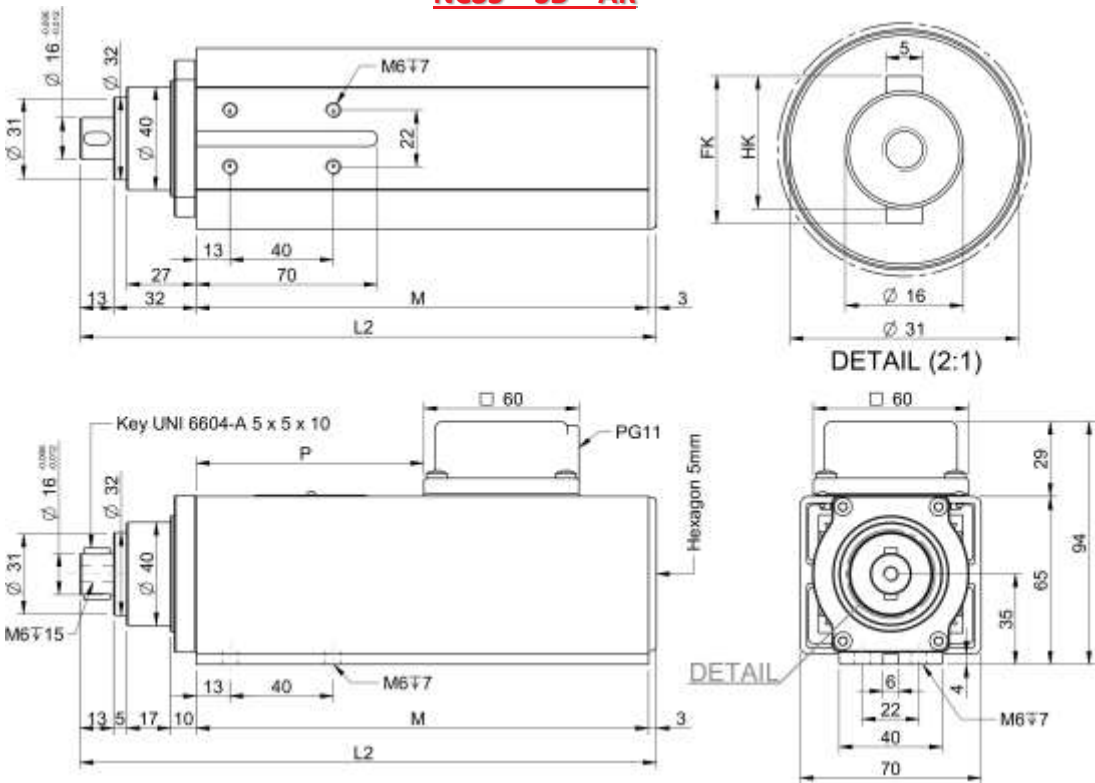

TYPE – TIPO – TYP	L2 [mm]	P [mm]	M [mm]	HK [mm]	FK [mm]
NC35-A-SB-AR	183	48	135	18	19
NC35-AA-SB-AR	183	48	135		
NC35-B-SB-AR	208	73	160		
NC35-C-SB-AR	223	88	175		
NC35-D-SB-AR	243	108	195		



NC35 – SB – L61

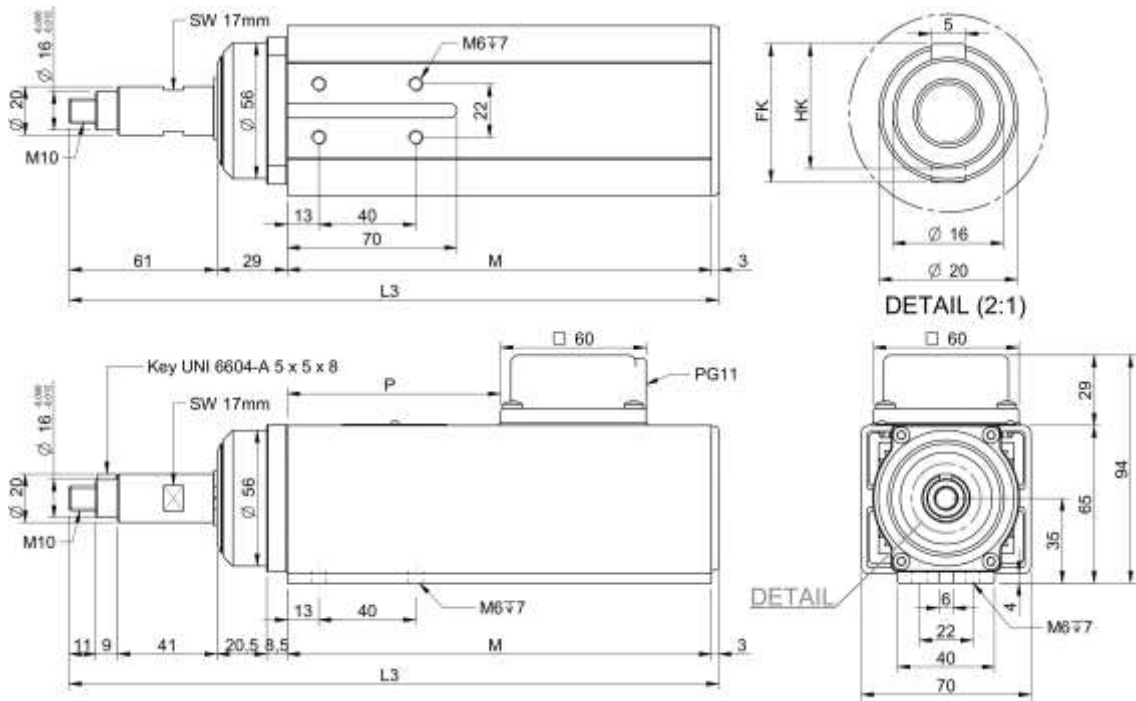

TYPE – TIPO – TYP	L3 [mm]	P [mm]	M [mm]	HK [mm]	FK [mm]
NC35-A-SB-L61	228	48	135	18	19
NC35-AA-SB-L61	228	48	135		
NC35-B-SB-L61	253	73	160		
NC35-C-SB-L61	268	88	175		
NC35-D-SB-L61	288	108	195		

